

**CARSON CITY PURCHASING & CONTRACTS**  
**201 North Carson Street Suite 3**  
**Carson City, NV 89701**  
**775-887-2133 extension 30137 / FAX 887-2107**  
<http://www.carson-city.nv.us/Index.aspx?page=998>

**NOTICE TO CONTRACTORS**

**BID #0910-217**

**Carson City Waterfall Fire Watershed Improvements - Phase 2**  
**Labor Commissioner PWP#CC-2010-350**  
**Public Works Project No. 1.0801**  
**Engineer's Estimate: \$200,000.00**

June 25, 2010

Addendum No. 1

Please make the following additions/changes to the above referenced project.

The date, time and place for receiving bids remains unchanged.

**TECHNICAL SPECIFICATIONS**

**EARTHWORK**

- 1.1 General. Add the following to this section: Two groundwater monitoring wells are in the areas of new work Well no 2 shall be raised approximately 5 feet or as necessary so that the lid is located 24 inches above finished grade, see exhibit "A". The monitoring wells are located along the CCWTP road and are 6 inch steel pipe with steel lids/locks. This work is to be included as a part of the bid item for Earthwork for Basin Excavation and Road Embankment Fill (BP-4).

**REVEGETATION**


1. General. The following shall be included under general work as a part of the revegetation: "If soil stockpiles show evidence of infestation of nuisance weeds such as mustards, foxtail, and other non-desirable vegetation the contractor shall apply Roundup or approved equal non-selective herbicide to the plants to eradicate them. Following a minimum ten (10) day waiting period after the application, the contractor shall remove all dead and dying plants from the stockpile and dispose in a waste receptacle to be hauled to the landfill. No soil may be used from the stockpile until the ten(10) day waiting period has lapsed." This work is to be included as a part of bid item for Re-vegetate Project Site (BP-10).

- 2.4 Willow/Wild Rose Salvage and Replanting. In addition to the fertilizer tablets, one B1 vitamin tablet shall be placed in the planting hole. This will be included as a part of revegetation. This work is to be included as a part of bid item for Re-vegetate Project Site (BP-10).

**Response to Requests for information:**

1. A question was asked concerning whether existing fences located where new work is to occur needed to be removed and then replaced upon completion of the new work. The portions of the existing fences that need to be removed as a part of constructing the new work shall be removed as a part of clearing and grubbing and no new fences need be constructed to replace those removed.

EXHIBIT "A" - Addendum #1

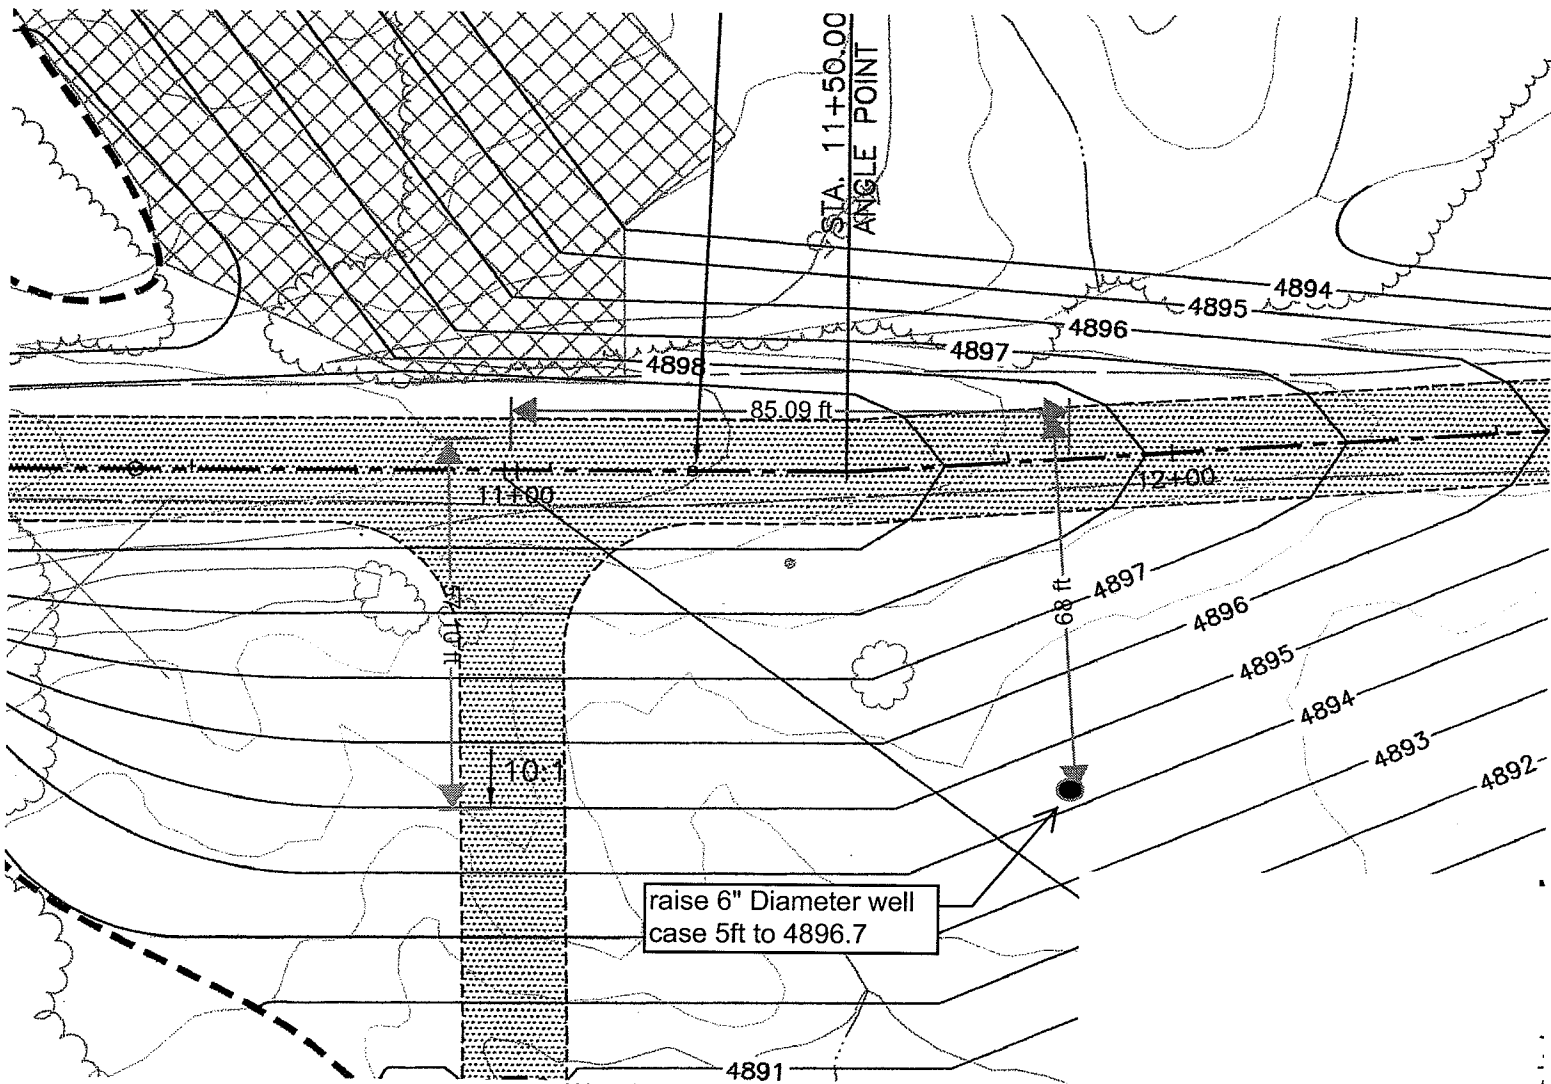

4891  
Waterfall Fire Watershed Improvements  
Phase 2