
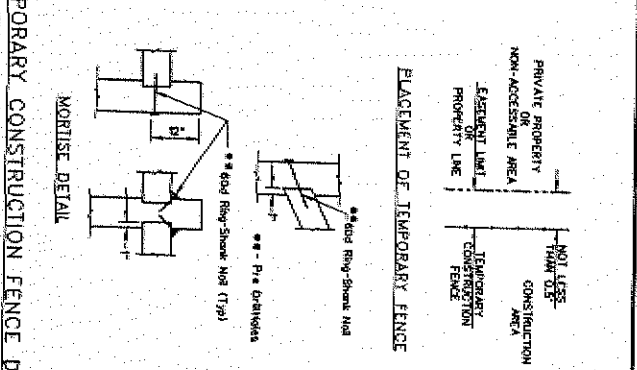
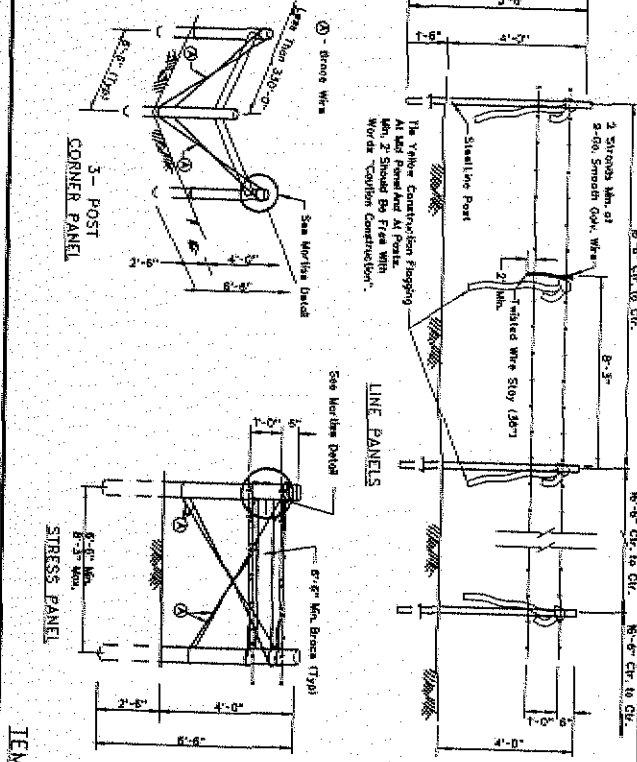
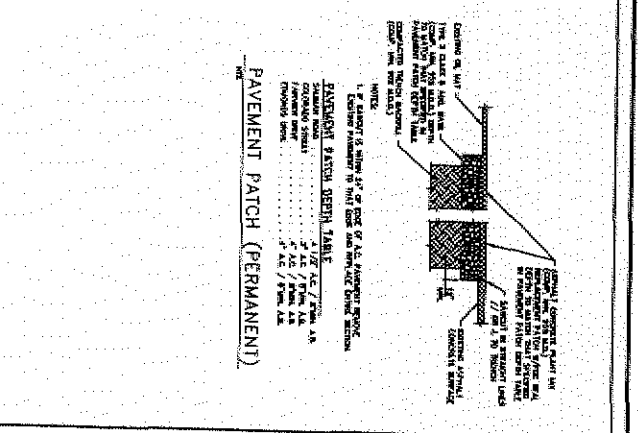


GENERAL NOTES

1. ALL WORK SHALL CONFORM TO THE PROJECT SPECIFICATIONS, STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION (ISSUED AS AMENDED), AND THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION FOR THE COUNTY OF NEVADA, AS APPLICABLE TO THE START OF CONSTRUCTION.
2. ALL TRAFFIC SIGNALS AND SIGNAGE SHALL BE THE PROPERTY OF THE CARSON CITY PUBLIC WORKS DEPARTMENT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION AND MAINTENANCE OF ALL TRAFFIC SIGNALS AND SIGNAGE THROUGHOUT THE CONSTRUCTION PERIOD.
3. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (U.S.A.) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS TO DETERMINE THE LOCATION OF ALL UTILITIES TO BE AVOIDED OR PROTECTED.
4. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (U.S.A.) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS TO DETERMINE THE LOCATION OF ALL UTILITIES TO BE AVOIDED OR PROTECTED.
5. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (U.S.A.) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS TO DETERMINE THE LOCATION OF ALL UTILITIES TO BE AVOIDED OR PROTECTED.
6. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (U.S.A.) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS TO DETERMINE THE LOCATION OF ALL UTILITIES TO BE AVOIDED OR PROTECTED.
7. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (U.S.A.) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS TO DETERMINE THE LOCATION OF ALL UTILITIES TO BE AVOIDED OR PROTECTED.
8. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (U.S.A.) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS TO DETERMINE THE LOCATION OF ALL UTILITIES TO BE AVOIDED OR PROTECTED.
9. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (U.S.A.) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS TO DETERMINE THE LOCATION OF ALL UTILITIES TO BE AVOIDED OR PROTECTED.
10. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (U.S.A.) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS TO DETERMINE THE LOCATION OF ALL UTILITIES TO BE AVOIDED OR PROTECTED.

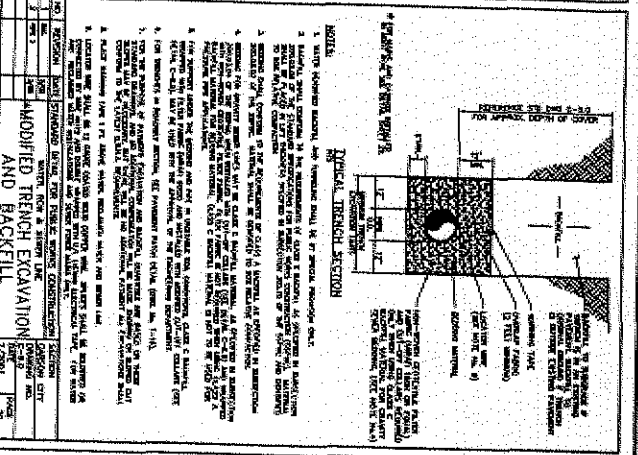

GENERAL NOTES:

1. STRESS PANELS SHALL BE PLACED EVERY 500' ON TANGENTS.
2. END PANELS SHALL BE USED WHENEVER A BREAK IN THE FENCE OCCURS.
3. BARBES OR BARBED WIRE MAY BE USED.
4. WRES ARE TO BE TIED OFF AT STRUTCH POINTS, WAYS AND SLICES.
5. TO BE TIED WITH AT LEAST 4 TURNS AT OPPOSITE END OF PANELS.
6. FOR OTHER DETAILS SEE STANDARD DRAWINGS AND GATE DETAILS.
7. FENCE POSTS, GATES AND WRES MAY BE BUILT BY THE CONTRACTOR.
8. FENCE IS TO BE REMOVED AND AREA RESTORED ONCE ALL CONSTRUCTION WORK IS COMPLETE.
9. ALTERNATE FENCING MATERIALS MAY BE USED IF THEY MEET THE SPECIFICATIONS OF THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION (ISSUED AS AMENDED), AND THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION FOR THE COUNTY OF NEVADA, AS APPLICABLE TO THE START OF CONSTRUCTION.
10. ALL TEMPORARY CONSTRUCTION FENCING SHALL BE REMOVED ONCE CONSTRUCTION ACTIVITIES ARE COMPLETED.

REV.	DATE	DESCRIPTION	BY	APP'D

PRELIMINARY
09/20/06

CARSON CITY PUBLIC WORKS DEPARTMENT
300 S. MAIN ST. CARSON CITY, NEVADA 89801
TEL: 795-7200 FAX: 795-7212

THE LOUIS BERGER GROUP, INC.
1000 W. WASHINGTON ST. LAS VEGAS, NV 89102

DESIGNED BY: JLR
DRAWN BY: JLR
CHECKED BY: JLR
SCALE: AS SHOWN
DATE: 09/20/06

NDOT/CARSON CITY
AGREEMENT PLANS
FOR INFORMATION ONLY
NOT FOR CONSTRUCTION