
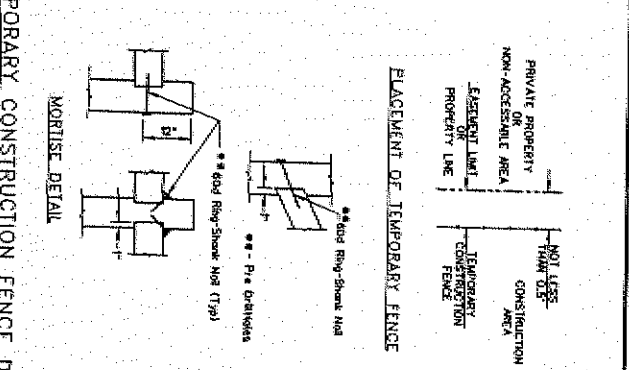
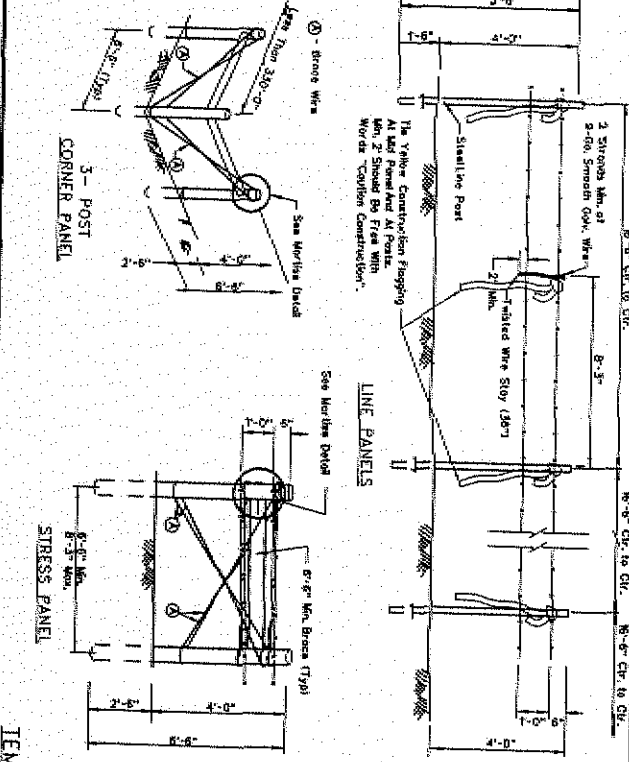
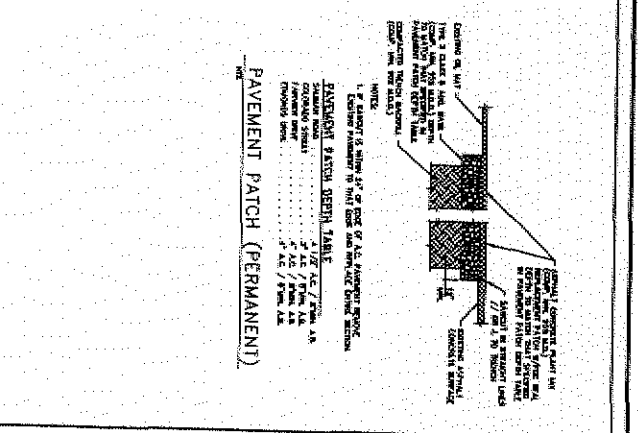


GENERAL NOTES

1. ALL WORK SHALL CONFORM TO THE PROJECT SPECIFICATIONS, STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION (ISSUED AS THE STANDARD SPECIFICATIONS FOR THE CONSTRUCTION OF PUBLIC WORKS CONSTRUCTION) AND THE STANDARD SPECIFICATIONS FOR THE CONSTRUCTION OF PUBLIC WORKS CONSTRUCTION.
2. ALL MATERIALS SHALL BE APPROVED BY THE CARSON CITY ENGINEER. ALL MATERIALS SHALL BE TESTED AND APPROVED BY THE CARSON CITY ENGINEER. ALL MATERIALS SHALL BE TESTED AND APPROVED BY THE CARSON CITY ENGINEER.
3. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS.
4. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS.
5. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS.
6. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS.
7. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS.
8. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS.
9. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS.
10. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS. THE CONTRACTOR SHALL CALL UNDERGROUND SERVICE ALERT (USA) BEFORE ANY EXCAVATION OR DRILLING OPERATIONS.

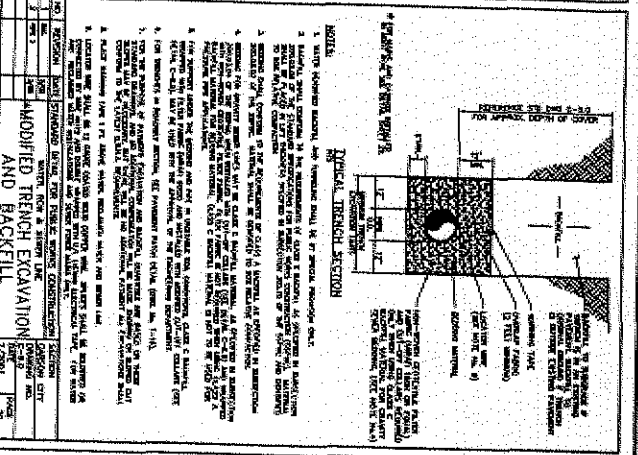

GENERAL NOTES

1. STRESS PANELS SHALL BE PLACED EVERY 500' ON TANGENTS.
2. END PANELS SHALL BE USED WHENEVER A BREAK IN THE FENCE OCCURS.
3. WELDED OR BARBED WIRE MAY BE USED.
4. WELDS ARE TO BE TIED OFF AT STRUTCH POINTS, WELDS AND SPLICE TO BE TIED WITH AT LEAST 4 TURNS AT OPPOSITE END OF PANELS.
5. TO BE TIED WITH AT LEAST 4 TURNS AT OPPOSITE END OF PANELS.
6. FOR OTHER DETAILS SEE STANDARD DRAWINGS AND GATE DETAILS.
7. FENCE POSTS, GATES AND WIRE MAY BE BUILT IN PLACE OR ASSEMBLED.
8. FENCE IS TO BE REMOVED AND AREA RESTORED ONCE ALL CONSTRUCTION WORK IS COMPLETE.
9. ALTERNATE FENCING MATERIALS MAY BE USED IF THEY MEET THE SAME OR BETTER PERFORMANCE AS THE MATERIALS SPECIFIED.
10. CHANGE SAFETY OR SIGN FENCING AS WORK SUPPORTED BY WORK CONTRACTOR'S OWNERS AND AT EACH CORNER FENCING SHALL BE BUILT TO THE SPECIFICATIONS OF THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION.
11. ALL TEMPORARY CONSTRUCTION FENCING SHALL BE REMOVED ONCE CONSTRUCTION ACTIVITIES ARE COMPLETED.